



TECHNICAL DATA

TAMPER

BT 80 D

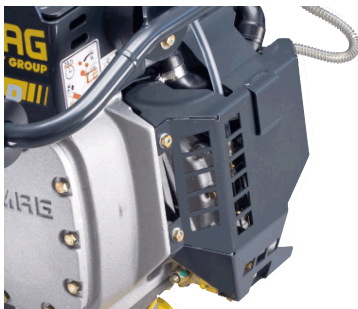

Long lifetime
All around engine protection

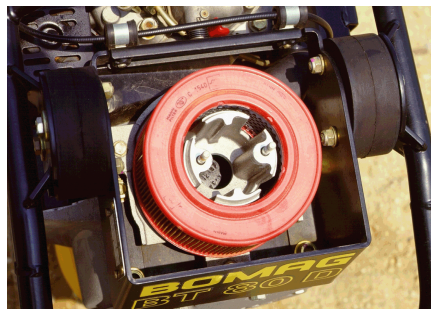


High level of reliability
Biggest air filter in the market



Simple operation
Vibration dampened guide handle

Shipping dimensions in m3

BT 80 D 0,268



Standard Equipment

- Vibration insulated steering bow
- Self-cleaning air filter housing
- Integrated fuel filter
- Protective engine covering
- Engine shut-down switch integrated in steering handle
- Infinitely variable frequency
- Single point lifting device
- Plastic castor as loading aid
- Semi-automatic decompression
- Recoil starter
- 3-2-1 Warranty

Optional Equipment

- Transport device with puncture proof wheels
- Tamper foot widths (280-290mm)
- Tool kit
- Service Kit
- TOUGH WARRANTY

Dimensions in mm

	B	H	L	L1	W
BT 80 D	350	1000	765	335	330

Technical Data

**BOMAG
BT 80 D**

Weights

Operating weight CECE	kg	81
Basic weight	kg	80

Dimensions

Working width (tamper plate)	mm	330
------------------------------------	----	-----

Driving Characteristics

Working speed max.	m/min	16
-------------------------	-------	----

Drive

Engine manufacturer	Yanmar
Type	L 48
Emission stage	non EPA
Cooling	air
Number of cylinders	1
Performance ISO 3046	kW 3,1
Speed	min-1 3.600
Fuel	Diesel
Drive system	mech.
Fuel comsump. aver. during operation	l/h 0,7

Exciter system

Frequency	Hz	8- 11,5
Impact force	kN	17,5

Capacities

Fuel	l	3,0
------------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 540 54 010

040219 Sa01

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

