


TECHNICAL DATA

STABILIZERS/ RECYCLERS

RS 360



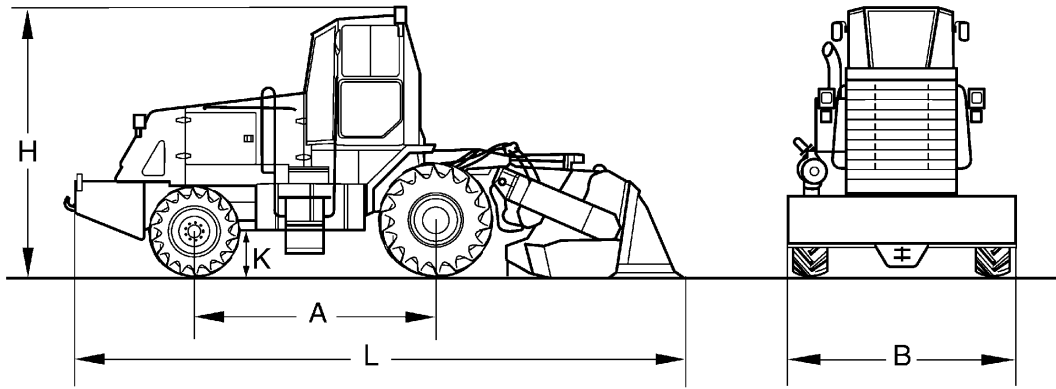

Dimensions in mm

	A	B	H	K	L
RS 360	3277	2921	3505	483	8407

Shipping dimensions in m3

RS 360	86,072
---------------	--------

Technical Data**BOMAG
RS 360****Weights**

Operating weight	kg	17.690
Axle load, front	kg	4.900
Axle load, rear	kg	12.790

Dimensions

Track radius, inner	mm	6.401
---------------------------	----	-------

Driving Characteristics

Speed (1)	km/h	0- 16,1
Max. gradeability (dep. on soil con.)	%	

Drive

Engine manufacturer		Cummins
Type		QSM 11
Emission stage		Stage IIIa / TIER3
Cooling		water
Number of cylinders		6
Performance ISO 9249	kW	268,0
Performance SAE J 1995	hp	360,0
Speed	min-1	2.100
Electric equipment	V	24
Drive system		hydrost.
Driven wheels		all wheel

Tyres

Tyre size, front		14.9x24 8PR
Tyre size, rear		28LR-26-165 A8STR

Brakes

Service brake		hydrost.
Parking brake		SAHR

Steering

Steering system		front
Steering method		hydraulic

Rotor

Rotor width	mm	2.005
Rotor diameter, outer	mm	1.118
Rotor speed 1	min-1	135
Rotor speed 2	min-1	150
Sense of rotation		up-cut
Max. cutting depth	mm	305
Number of cutting teeth		168

Capacities

Fuel	l	908,0
------------	---	-------

Technical modifications reserved. Machines may be shown with options.

Standard Equipment

- Hydrostatic rotor drive with automatic power adjustment
- Hydrostatic drive
- Anti Slip Control (ASC)
- Rear drive system with Double Reduction
- Planetary Gearbox Drive and SAHR brakes
- Connectible all wheel drive
- Hydraulic power steering
- Single lever control for travel and steer assist braking
- Battery disconnect switch
- Two-stage double air filter system
- Emergency engine shut down
- Vehicle hydraulic system monitoring and warning system
- Warning horn
- Emergency STOP
- Back-up alarm

Optional Equipment

- ROPS/FOPS cabin with seat belts
 - + heating
 - + Air condition
- Working lights
- 4-way flashers (US-Standard)
- Water metering system
- Special paint
- ROPS/FOPS
- TELEMATIC POWER

