

Longer service life for mix road application




SUPER DM



Reinforced Wear Proof Compound

for better wearing resistance performance

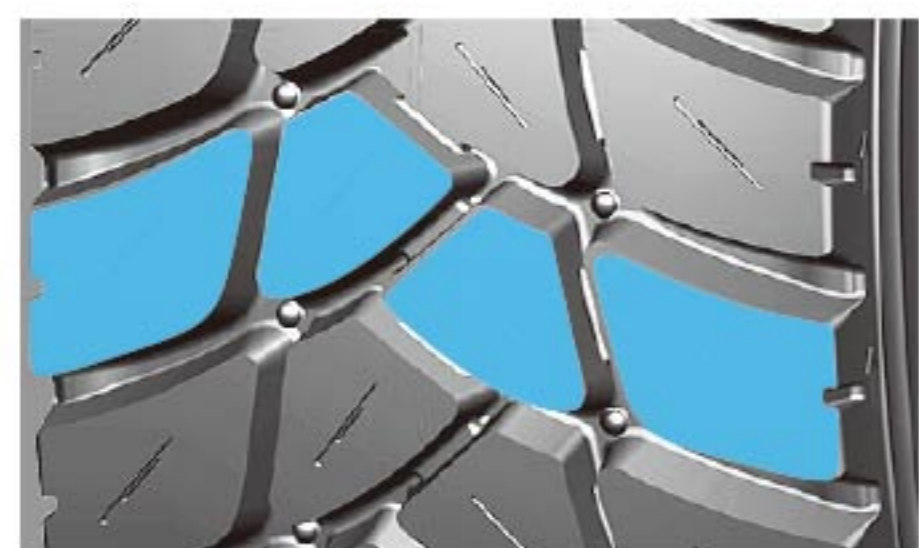

Tractive Pattern Design

for better traction capacity

Size	PR	Tread Depth (mm)	LI & SS	Load Capacity (kg)		Max. Load Capacity (kg)	Standard Pressure (kPa)	Type
				Single	Dual			
11R22.5	18	21	148/145K	3150	2900	2900	850	TL
13R22.5	18	21.5	154/151K	3750	3450	3450	830	TL
315/80R22.5	20	21.5	156/153K	4000	3650	4745	850	TL