

Extra-high Load for Intercity Transport



**200%
Max. Load
Capacity**

**70% on road
30% off road**

MIX ROAD



- Extra-high Load Carrying Capacity**



Size	PR	Tread Depth (mm)	LI & SS	Load Capacity (kg)		Max. Load Capacity (kg)	Standard Pressure (kPa)	Type
				Single	Dual			
7.50R16	14	13.5	122/118L	1500	1320	2640	770	TT

Extra-high Load Carrying Capacity



250%
Max. Load
Capacity

70% on road
30% off road

MIX ROAD 




- Extra-high Load Carrying Capacity**




Size	PR	Tread Depth (mm)	LI & SS	Load Capacity (kg)		Max. Load Capacity (kg)	Standard Pressure (kPa)	Type
				Single	Dual			
8.25R16	14	13.5	126/122L	1700	1500	4000	670	TT
8.25R16	16	13.5	128/124L	1800	1600	4000	770	TT

Super Enhanced Design

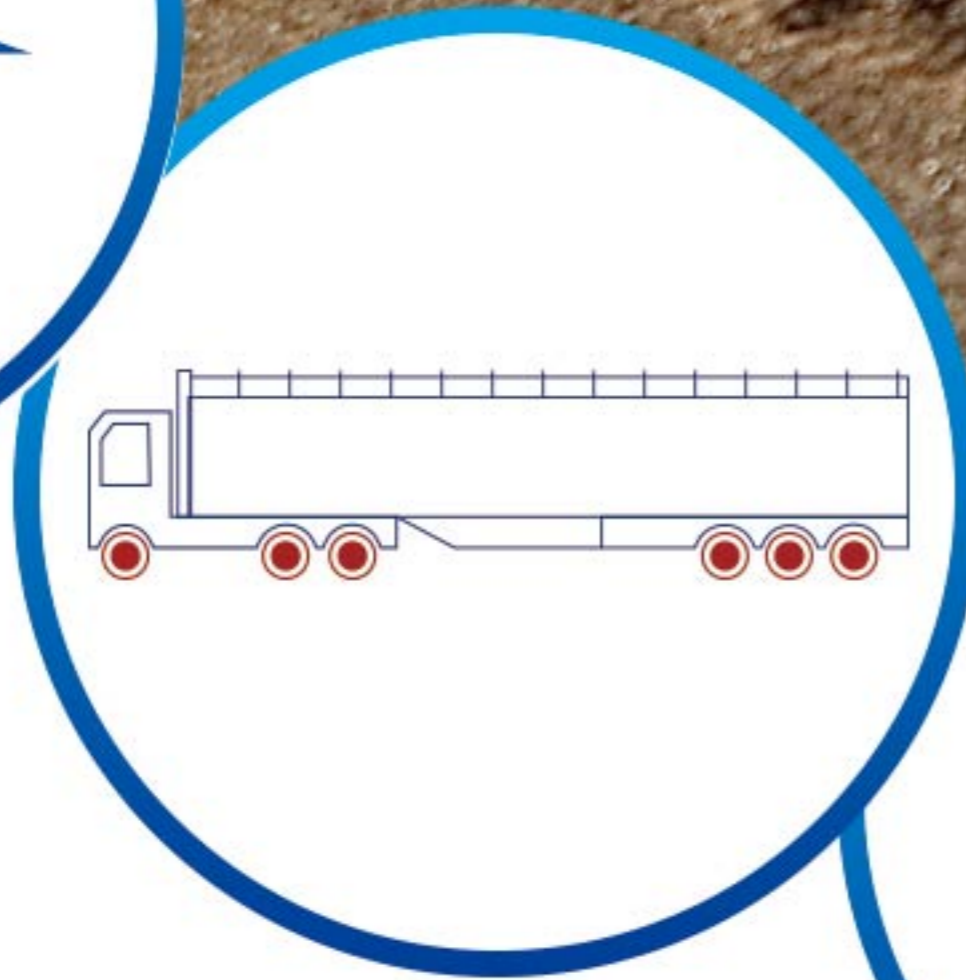

22PR

TKAM S

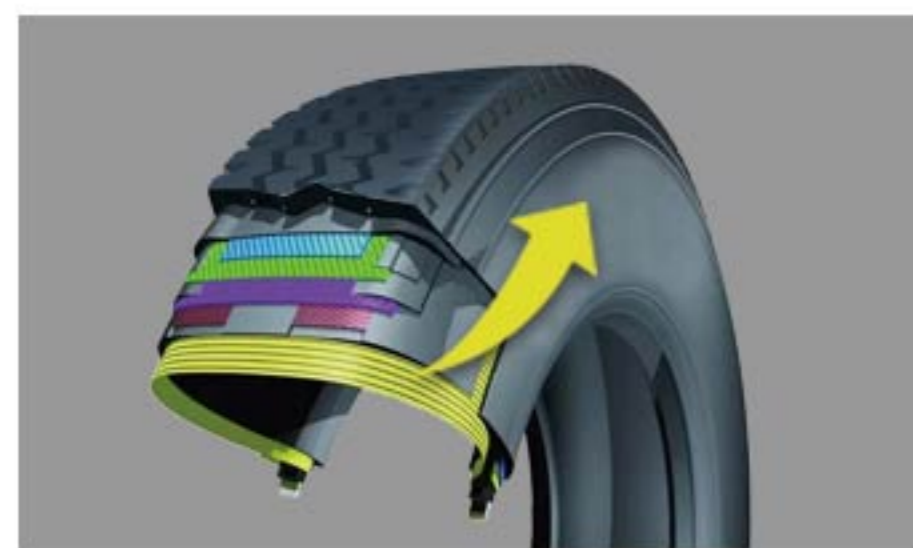


Optimized Belt Wire Strength

to increase rigidity across the entire tread surface, for enhanced durability and total wear.



Strengthened Carcass & Bead

to increase the impact resistance and carry 160% heavy load with higher safety index.

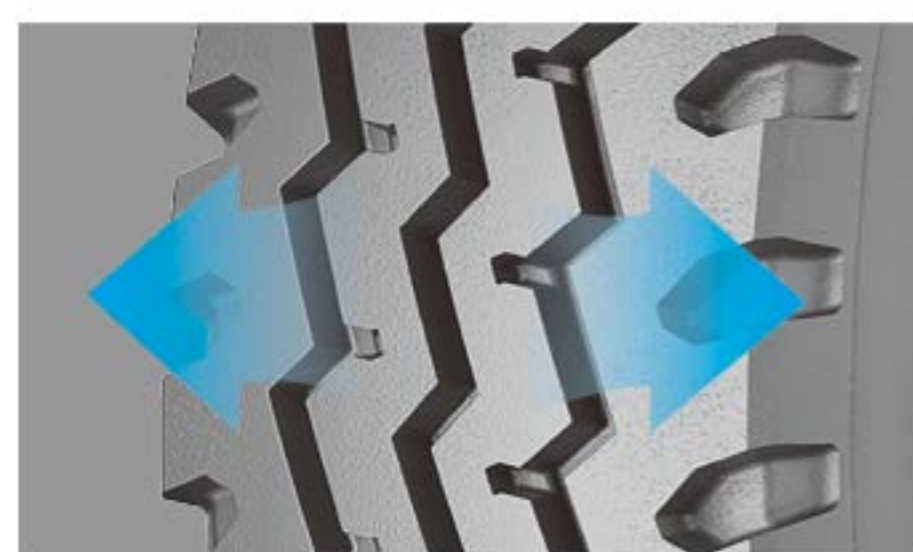

248mm-Super Wider Tread Design

for better wear resistance performance and longer tire life.

Size	PR	Tread Depth (mm)	LI & SS	Load Capacity (kg)		Max. Load Capacity (kg)	Standard Pressure (kPa)	Type
				Single	Dual			
315/80R22.5	22	17.5	164/160L	5000	4500	6500	930	TL