

# Better Traction Capacity



**200%  
Max. Load  
Capacity**



**70% on road  
30% off road**


**MIX ROAD**




**TKDM S**

# TKDM S

## ☆ Better heavy load capacity

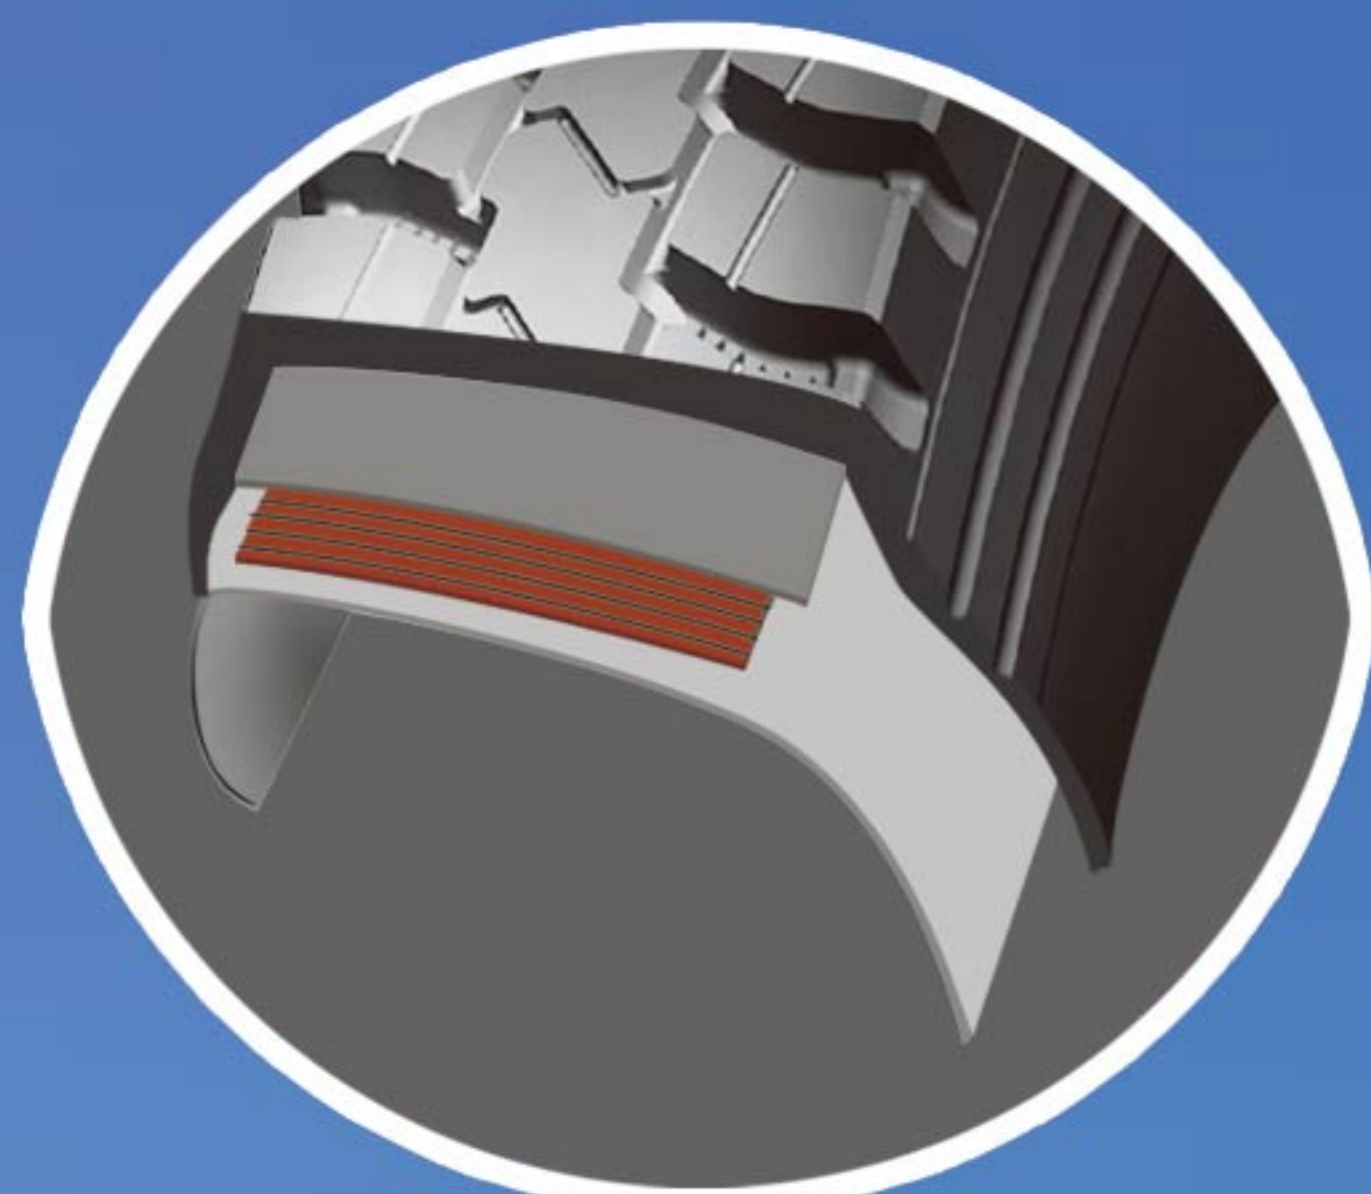

High-tensile Steel Wires Design

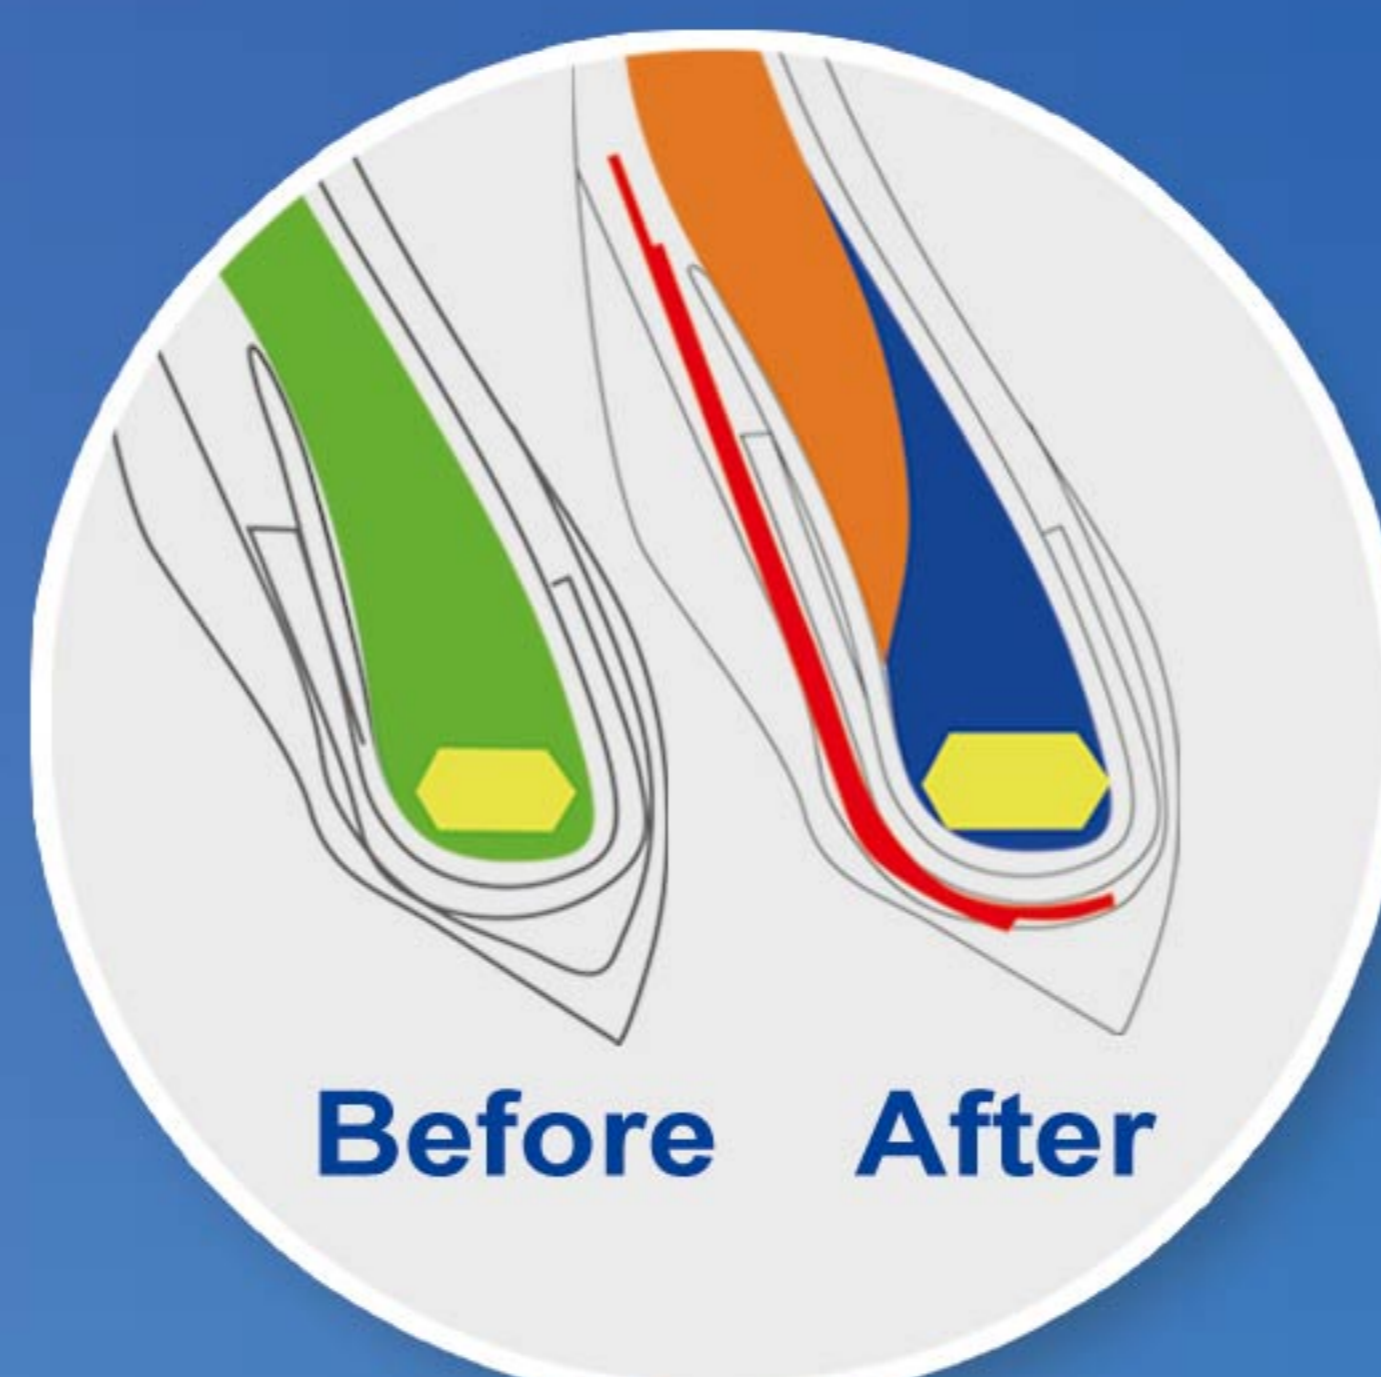

Super Stiff Design

## ☆ Better puncture resistance performance



Stone Shy Design for avoiding groove puncture



Size	PR	Tread Depth (mm)	LI & SS	Load Capacity(kg)		Max. Load Capacity (kg)	Standard Pressure (kPa)	Type
				Single	Dual			
7.50R16	14	14.5	122/118L	1500	1320	2640	770	TT
8.25R16	16	15.2	128/124L	1800	1600	4000	770	TT
11.00R20	18	19	152/149K	3550	3250	6500	930	TT
12.00R20	20	19.5	156/153K	4000	3650	7300	900	TT