


Longer Service Life



TKSH III

160% load capacity with high speed application

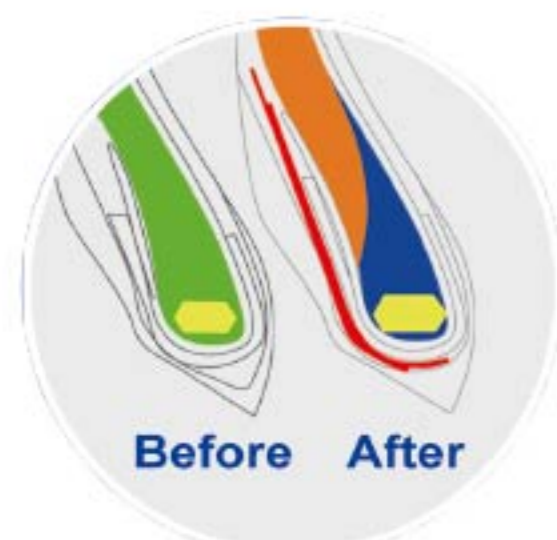

Super Stiff Design

for impact resistance performance



Close-shoulder Design

for preventing uneven shoulder wearing

Size	PR	Tread Depth (mm)	LI & SS	Load Capacity (kg)		Max. Load Capacity (kg)	Standard Pressure (kPa)	Type
				Single	Dual			
295/80R22.5	18	15	152/149M	3550	3250	5200	900	TL

FOCUS ON MINING & CONSTRUCTION INDUSTRY

www.techking.com